

G5.BT Battery Tester Series

The G5.BT series is bidirectional regenerative. It was developed specifically for testing energy storage devices and is suitable for use in laboratories and on test benches. The modular and finely graded G5.BT series is characterized by highly dynamic response times and a wide current-voltage range with an auto-ranging factor 3. The G5.BT series has an outstanding current accuracy of <0.02% FS, an additional high-resolution current measurement range, and a fast current rise time in the 100 μ s range. Ripple modulation, an integrated safety relay for PLC according to EN ISO 13849 and a powerful CAN multi-protocol interface (1 kHz, 16 bit) as well as functions to avoid reverse-polarity problems, current surges, and unwanted deep discharges make the G5.BT series the ideal, versatile battery module and battery pack tester.

Device Types

Voltage V	Power kW	Current A	Height U	Order Code
0...500	18	-108...108	4	G5.BT.18.500.108
0...500	27	-162...162	7	G5.BT.27.500.162
0...500	36	-216...216	7	G5.BT.36.500.216
0...500	54	-324...324	10	G5.BT.54.500.324
0...1000	18	-54...54	4	G5.BT.18.1000.54
0...1000	36	-108...108	7	G5.BT.36.1000.108
0...1000	54	-162...162	10	G5.BT.54.1000.162
0...1500	27	-54...54	7	G5.BT.27.1500.54
0...1500	54	-108...108	10	G5.BT.54.1500.108

Modular and Easy Scalable Systems

The output of an individual power supply is in the range from 0...18 kW to 0...2000+ kW, up to 3000 VDC. The advantageous modularity of REGATRON power supply solutions allows the system to be easily adapted to ever changing test requirements. Not only is it possible to reconfigure between parallel, series, and mixed operation, but also to expand the system

with additional power supply units or to split it into smaller units.

Therefore, the purchase of a REGATRON power supply is a solid investment for the future.

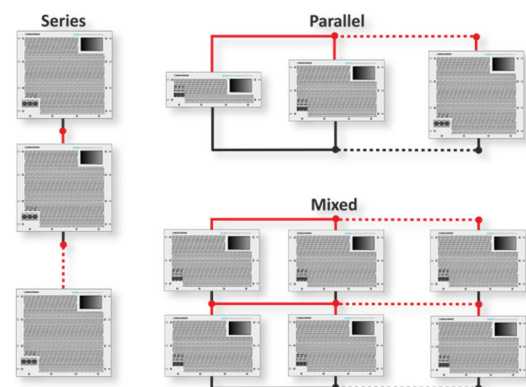


Figure 1: Modular concept for easy power and voltage increase by parallel, series, and mixed operation. The parallel configuration allows even an operation of different power levels, e.g., 18, 36, and 54 kW modules, in one system.

Whether for single devices or powerful multi-device master-slave systems, REGATRON also offers turn-key cabinet solutions or project specific system integration according to customer specifications.

Battery Module/Pack-Testing Features

The G5.BT series has an exceptional electrical performance that offers several advantages for battery testing applications:

- Accuracy of <0.02% FS
- Additional high-resolution current measurement range from -10 to 10% FS
- Current rise time in the 50...200 μ s range
- Parameterizable to avoid overshoot
- Current ripple modulation up to 10 kHz

In addition, the G5.BT provides important features for user safety, power supply, and battery protection. It avoids:

- Reverse-polarity problems
- Arcing and high inrush current when connecting the battery to the DC terminals even at unmatched voltage levels
- Deep battery discharge at voltage off state (DC port impedance >10 M Ω)

Features such as adjustable controller settings and the integrated powerful 8-channel digital scope assist the user to quickly and easily achieve optimal system behavior for a special application requirement. The G5.BT series also offers the possibility to store, edit and recall any device configuration on board the power supply.

Dynamics

Maximum speed or minimum overshoot? Figure 2 shows that the dynamic parameters of the G5.BT series can be easily adapted to a specific task.

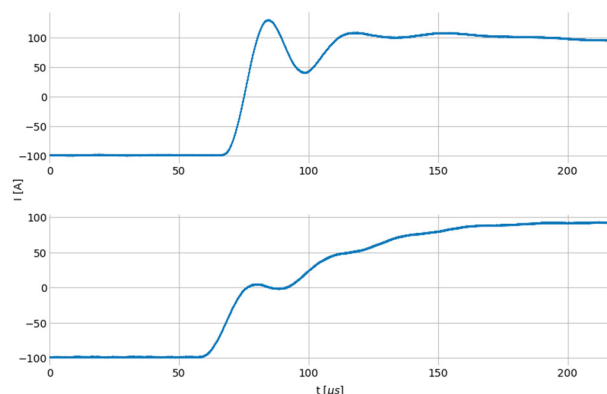


Figure 2: Parameterization example: set-value step currents. -97...97 A@333VDC in <50 μ s with overshoot (top), in <200 μ s w/o overshoot (bottom).

General Dynamic Data

rise/fall time	voltage 0...90%	150...200 μ s
set-value step	current -90...90%	50...100 μ s
response time load step	CV, recovery within 0.5% set value	100...150 μ s

Control Modes

- CV constant voltage
- CC constant current
- CP constant power
- CR constant resistance
- Ri internal resistance simulation

Interfaces

Ethernet and USB

To connect with:

- G5.Control the operating and maintenance software
- BatControl the application software for battery testing
- API .NET programming, e.g., by LabView, Python, Matlab, or REST interface

I/O port

Interface featuring analog and digital signals used for set and actual values or operating states.

CAN Interface

The CAN multi-protocol (CANmp) interface has a 1 kHz data rate, a 16-bit resolution and is adaptable to any proprietary CAN bus. In addition, it supports dbc file handling.

Integrated Safety Relay

Integrated safety relay (ISR) for increased emergency stop reliability supporting performance level PL c / PL e according to EN ISO 13849.

Grid Connection

The wide-band AC input accepts all common AC grid systems and has an active power factor correction.

- AC Grid 380...480 VAC \pm 10% at 50/60 Hz
- PF 0.99
- Efficiency 95...96%

Options

Software and Control

BatControl

The battery tester is controlled by interfaces such as CANmp for the integration into automated test benches or by the optional application software BatControl for R+D applications in the laboratory.

BatControl allows selecting and running so-called BatScripts. These scripts automate the manually given commands to the G5 Battery Tester and allow the running of these commands according to defined schedules.

- Define charge and discharge algorithms
- Run drive cycles (according to own or already defined standards)
- Repeat previously recorded discharge/charge data

Time-Based Function Generator

The TFE time-based function generator allows programming either through G5.Control operating software, HMI touch display, or CANmp interface.

- Time-dependent functions $U = f(t)$, $I = f(t)$, $P = f(t)$: sine, triangle, or square as well as user-defined data points. Import and export through csv files supported
- Sweep function for current ripple modulation 0...10 kHz

HMI

The HMI built into the front panel allows comprehensive and convenient operation of the power supply via touch display.



Figure 3: Intuitive control by HMI touch display. Everything you need at a glance.

User Safety

- Discharge of AC filter (XCD), recommended for mobile use of the device. XCD ensures a discharge time of the AC filter <1 s required by EN 62477-1
- AC terminal protection cover (PAC.AC), recommended for use as tabletop unit

Rack-Integrated System Solutions

- Mobile rack solutions up to IP54
- Insulation monitoring: remote activation of the insulation measurement, actual insulation value and warning/error status are provided by CANmp interface or by optional HMI
- Easy reconfiguration between parallel, series, and mixed operation



Figure 4: REGATRON's rack-integrated turn-key system solutions, e.g., 72 kW (left) and 162 kW (right) power levels. Various types of AC/DC connectors and cables allow for comfortable handling. Third-party product integration and numerous safety options are additional features.

Environmental Conditions

Front-panel-mounted air filter (AirFilter), recommended for use in dusty environments.

Important Features of the G5.BT Series

Technology

- Technologically advanced, fast switching, compact 19-inch power supplies
- High control dynamics in the 100...200 μ s range – even at higher power levels
- Exceptional accuracy of <0.02% FS, additional high-resolution measurement range
- Wide current-voltage range with an auto-ranging factor 3
- CV, CC, CP, CR, and Ri-Sim control modes
- Regenerative and highly efficient, resulting in significant reduction of energy consumption and heat dissipation

System Capability

- Modular and easy scalable systems
- Parallel, series, and mixed operation with a digital high-speed bus
- Simple master-slave configuration with the operating software
- Easy rack mounting
- Optional safety features such as 2-channel safety interface and insulation monitoring
- Turn-key cabinet solutions or project-specific system integration according to customer specification

System Control and Options

- Operating software, extended analysis, and parameterization options, calibration
- Application software with visualization, programming, and data logger
- Powerful application programming interfaces (APIs)

For detailed technical information, contact your local sales partner or REGATRON.

Regatron AG
Feldmühlestrasse 50
9400 Rorschach
SWITZERLAND

sales@regatron.com
www.regatron.com

Regatron Inc.
100 Overlook Center, 2nd Floor
Princeton, NJ 08540
USA

inquiries@us.regatron.com
www.us.regatron.com

All product specifications and information herein are provisional and subject to change without notice.

Filename: PD_G5.BT_EN_210331.docx

REGATRON DC & AC Power Supplies: Modular · Precisely Engineered · Technologically Advanced

NEW
DC Generation 5

